


Berkvens, May 2009. Berkvens shall not be liable for technical or editorial errors or omissions contained herein. The information is provided "as is" without warranty of any kind and is subject to change without notice.

30 MINUTES FIRE RATED DOORCHECK

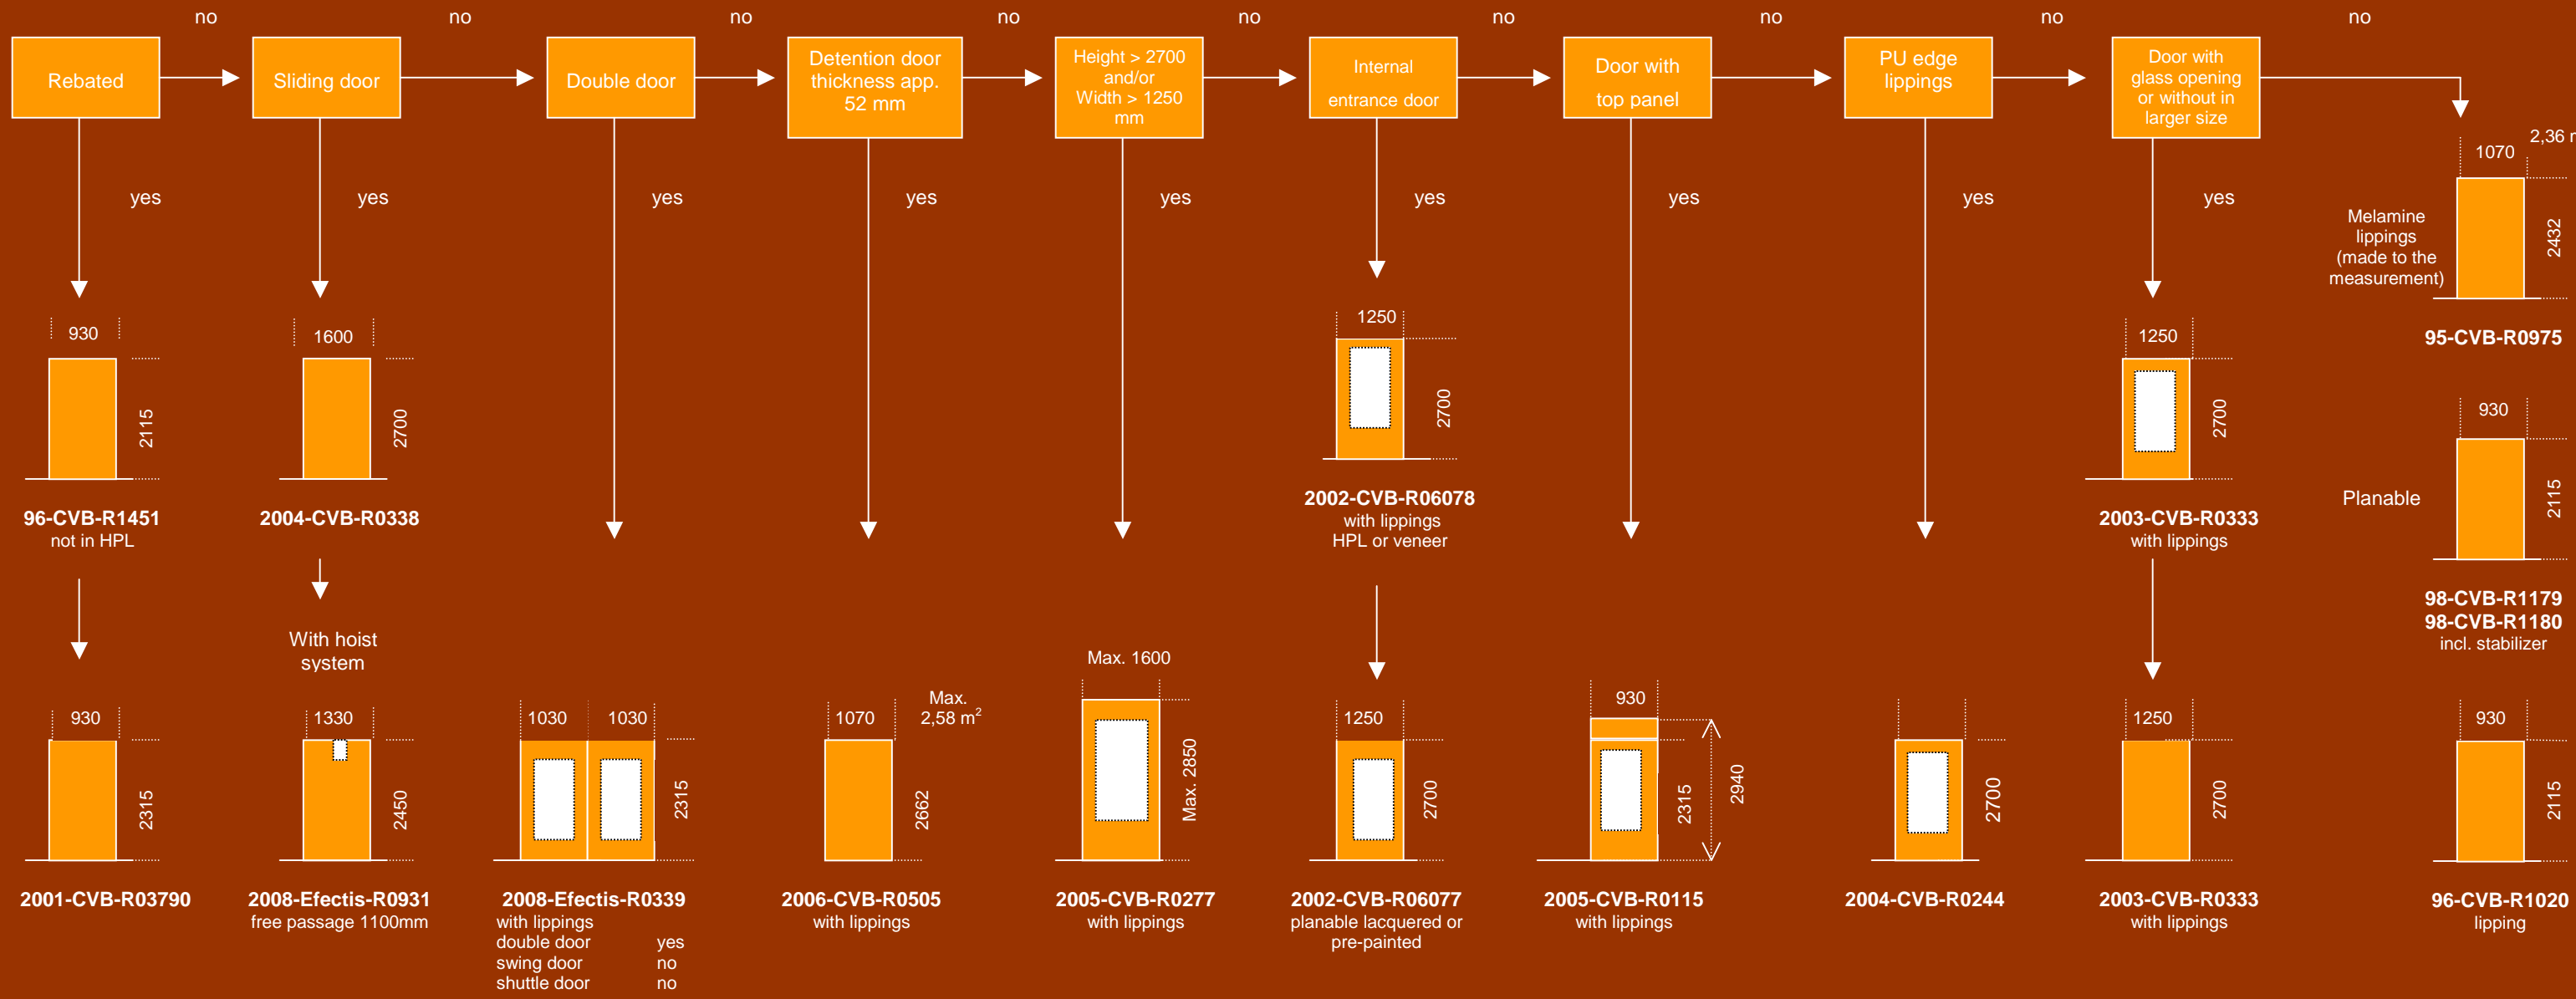



NEN 6069	NEN-EN 1634-1	NEN-EN 1634-1	NEN-EN 1634-1	NEN-EN 1634-1	NEN-EN 1634-1	NEN-EN 1634-1	NEN-EN 1634-1	NEN-EN 1634-1	NEN 6069
Intumescent material in frame: no Drop threshold permitted: no Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: yes Wooden mounting: no Steel mounting: only R 1451: yes	Intumescent material in frame: yes Drop threshold permitted: no Frame: Vari-Doors sliding door systems: yes PU edge lippings: yes	Intumescent material in frame: no Glass opening permitted: yes Drop threshold permitted: no Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: no Wooden mounting: no Steel mounting: no PU edge lippings (hinge side): yes Door should be equipped with Alpronon meeting stile type 9000-series	Intumescent material in frame: no Glass opening permitted: no Drop threshold permitted: yes Vision section permitted: yes Frames: Wooden immure: yes Steel immure: yes Wooden mounting: no Steel mounting: no PU edge lippings (hinge side): no	Intumescent material in frame: no Glass opening permitted: yes Drop threshold permitted: yes Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: no Wooden mounting: no Steel mounting: no PU edge lippings: yes	Intumescent material in frame: no Glass opening permitted: yes Drop threshold permitted: yes Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: no Wooden mounting: no Steel mounting: no PU edge lippings: yes	Intumescent material in frame: no Glass opening permitted: yes Drop threshold permitted: yes Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: no Wooden mounting: yes Steel mounting: no PU edge lippings: yes Remark: wooden immure frame with side and/or fanlight.	Intumescent material in frame: no Glass opening permitted: yes Drop threshold permitted: yes Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: yes Wooden mounting: yes Steel mounting: yes PU edge lippings: yes Remark: wooden immure frame with side and/or fanlight.	Intumescent material in frame: no Glass opening permitted: yes Drop threshold permitted: yes Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: yes Wooden mounting: yes Steel mounting: yes PU edge lippings: yes Remark: wooden immure frame with side and/or fanlight.	Intumescent material in frame: no Glass opening permitted: no Drop threshold permitted: no Spy hole permitted (max. 15 mm): yes Frames: Wooden immure: yes Steel immure: no Wooden mounting: no Steel mounting: no

Rebate size steel frames: 15 x 45 mm, rebate size wooden frames: 25 x 45 mm. All dimensions are in millimeters and all sizes are maximum certified sizes. Spy hole must be winded with intumescent material. Drop threshold: max groove 15x29mm. Doors with glass opening are also permitted without glass opening. Maximum size glass opening: 760 x 2062 mm, various square glass openings possible: ask for the possibilities!

latest up-date: 12.05.09
www.berkvens.eu

Berkvens, May 2009. Berkvens shall not be liable for technical or editorial errors or omissions contained herein. The information is provided "as is" without warranty of any kind and is subject to change without notice.


60 MINUTES FIRE RATED DOORCHECK

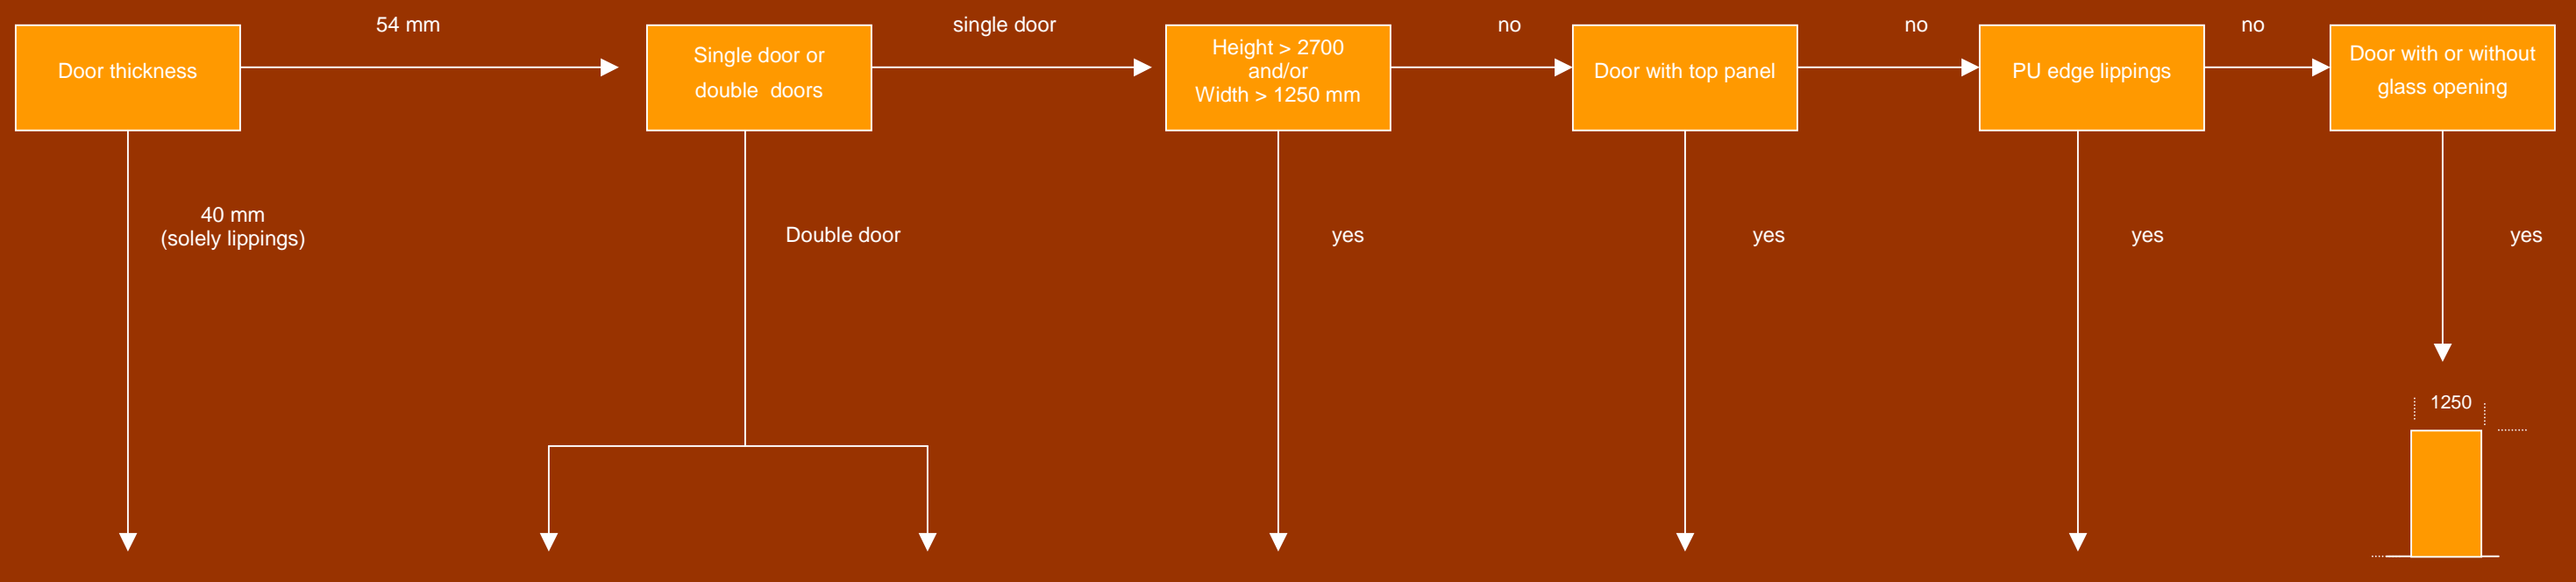

98-CVB-R1056

NEN 6069


Intumescent material in frame: yes
 Drop threshold permitted: no
 Spy hole permitted (max. 15 mm): yes
 Frames: Wooden immure: yes
 Steel immure: no
 Wooden mounting: no
 Steel mounting: no

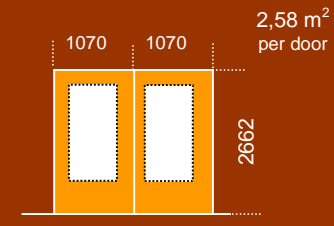

2003-CVB-R0036

NEN 6069


Intumescent material in frame: only with shuttle doors
 Glass opening permitted: yes
 Drop threshold permitted: yes,
 Max. groove: 18x35 mm
 Frames: Wooden immure: yes
 Steel immure: no
 Wooden mounting: no
 Steel mounting: no
 PU edge lippings (hinge side): yes
 Remark: doors have to be provided with Alprokon meeting stiles (www.alprokon.com)

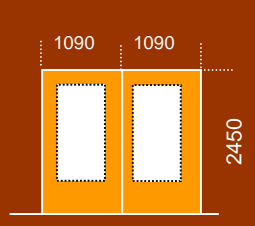

2008-Efectis-R0930

NEN-EN 1634-1


Intumescent material in frame: no
 Glass opening permitted: yes
 Drop threshold permitted: yes,
 Max. groove: 18x35 mm
 Frames: Wooden immure: yes
 Steel immure: yes
 Wooden mounting: no
 Steel mounting: no
 PU edge lippings (hinge side): yes
 Remark: doors have to be provided with Alprokon meeting stile type 9000-series.



2006-CVB-R0033

NEN-EN 1634-1


Intumescent material in frame: no
 Glass opening permitted: yes
 Drop threshold permitted: yes,
 Max. groove: 18x35 mm
 Spy hole permitted (max. 15 mm): yes
 Frames: Wooden immure: yes
 Steel immure: yes
 Wooden mounting: no
 Steel mounting: no
 PU edge lippings: yes



2005-CVB-R0345

NEN-EN 1634-1


Intumescent material in frame: no
 Glass opening permitted: yes
 Drop threshold permitted: yes,
 Max. groove: 18x35 mm
 Spy hole permitted (max. 15 mm): yes
 Frames: Wooden immure: yes
 Steel immure: yes
 Wooden mounting: no
 Steel mounting: no
 PU edge lippings: yes
 Remark: wooden inmure frame with side and/ or fanlight.



2004-CVB-R0335

NEN-EN 1634-1

Intumescent material in frame: no
 Glass opening permitted: yes
 Drop threshold permitted: yes,
 Max. groove: 18x35 mm
 Spy hole permitted (max. 15 mm): yes
 Frames: Wooden immure: yes
 Steel immure: yes
 Wooden mounting: no
 Steel mounting: no
 Remark: wooden inmure frame with side and/ or fanlight.



2004-CVB-R0154

NEN-EN 1634-1

Intumescent material in frame: no
 Glass opening permitted: yes
 Drop threshold permitted: yes,
 Max. groove: 18x35 mm
 Spy hole permitted (max. 15 mm): yes
 Frames: Wooden immure: yes
 Steel immure: yes
 Wooden mounting: no
 Steel mounting: no
 PU edge lippings: yes
 Remark: wooden inmure frame with side and/ or fanlight.

Rebate size steel frames: 20 x 59 mm, rebate size wooden frames: 25 x 59 mm. All dimensions are in millimeters and all sizes are maximum certified sizes. Spy hole must be winded with intumescent material.

Doors with glass opening are also permitted without glass opening. Maximum size glass opening: 760 x 2062 mm, various square glass openings possible: ask for the possibilities!

Berkvens B.V. | Kanaaldijk Noord 24 | P.O. Box 2 | 5710 AA Someren | The Netherlands | T. +31 (0)493 49 91 11 | F. +31 (0)493 49 62 95 | info@berkvens.eu | www.berkvens.eu

latest up-date: 12.05.09
 www.berkvens.eu